

# STEALTH 7000™

JUNIOR RANGE - BLACK TEMPLES - CLEAR LENS

CONTOUR DESIGN & FLEXIBILITY OF FRAME GIVES A GOOD VERSATILE FIT ONTO BOTH SMALLER & LARGER FACES


## TECHNICAL SPECIFICATION

### EYE & FACE PROTECTION

#### INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

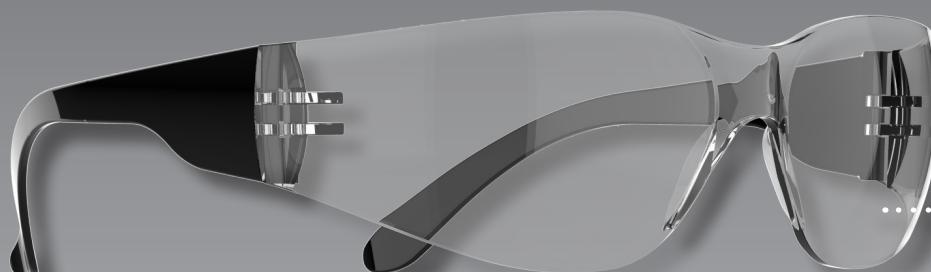

**FRAME:**  
Polycarbonate



**LENS:**  
Polycarbonate

#### PERFORMANCE

Lens and frame offer protection against low energy high-speed particles at 45m/s (101mph)

The optical qualities of the lens comply with the requirements of optical class 1 (highest)



#### CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature



#### CONFORMITY

Conforms to EN 166 1.F & EN 170

EC Certificate Number C1017.3JSP issued by ECS GmbH

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jpsafety.com](mailto:technical@jpsafety.com)



MANUFACTURING FOR SAFETY  
[WWW.JSPSAFETY.COM](http://WWW.JSPSAFETY.COM)

UKSALES@JSPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 06/10/21-V5

# STEALTH 7000™

JUNIOR RANGE - BLACK TEMPLES - CLEAR LENS

CONTOUR DESIGN & FLEXIBILITY OF FRAME GIVES A GOOD VERSATILE FIT ONTO BOTH SMALLER & LARGER FACES



## TECHNICAL SPECIFICATION

### EYE & FACE PROTECTION

#### DIMENSIONS OF INNER BOX

Quantity: 10


Weight: .24Kg pk -10 (Approx.)

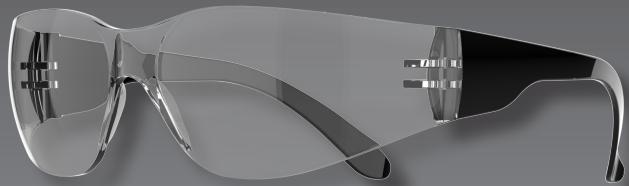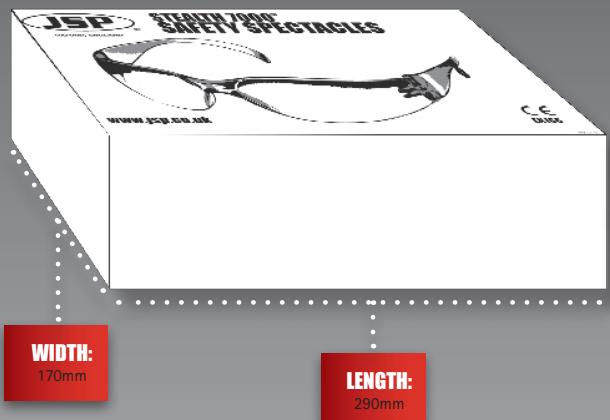

#### DIMENSIONS OF OUTER PACKAGING

Quantity: 120

Weight: 3.7kg (Approx.)

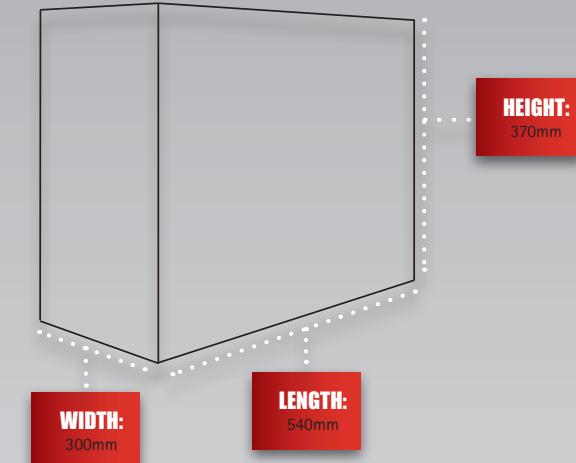

#### MARKINGS

Frame: EN166 1.F.H

Clear Lens: 2C-1.2



1.F.H.K

#### DIMENSIONS OF SPECTACLE

Lens Thickness: 2.3mm

Lens Size (Vertical): 39mm

Lens Size (Diagonal): 66mm

Bridge: 10.6mm

Temple Length (Lens to tip): 144mm

Overall Width: (hinge-hinge)120mm

Closest point between temple tips: 73mm

Weight: 18.5g (Approx)

#### LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 7000™ is not suitable for protection against dusts, liquids or molten metals

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jpsafety.com](mailto:technical@jpsafety.com)



MANUFACTURING FOR SAFETY  
[WWW.JPSAFETY.COM](http://WWW.JPSAFETY.COM)

UKSALES@JPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 06/10/21-V5