



DH 44

Condensation dehumidifiers

Highly efficient machines designated to operate in harsh work conditions. Ideal for industry and construction. Sturdy and cost-effective range of portable dehumidifiers ideally suited for projects in the construction industry, restoration jobs, water damage control and more.




Master DH 44




Master DH 44 restoration



Master DH wine production

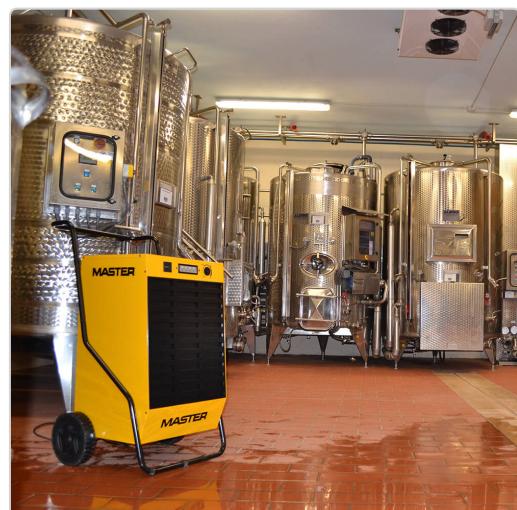


Master DH wine production

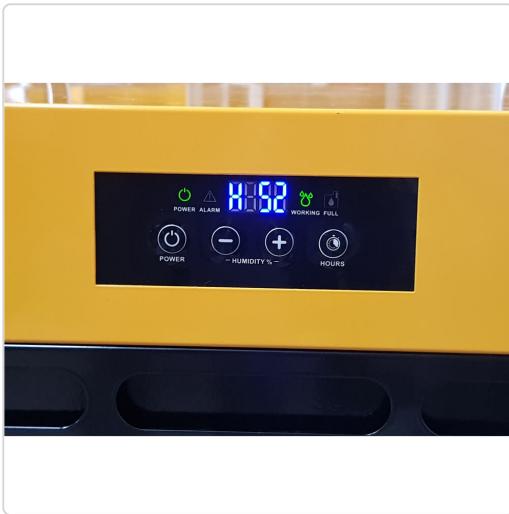

Digital control panel



Compact foam air filter enables work in very dusty spaces

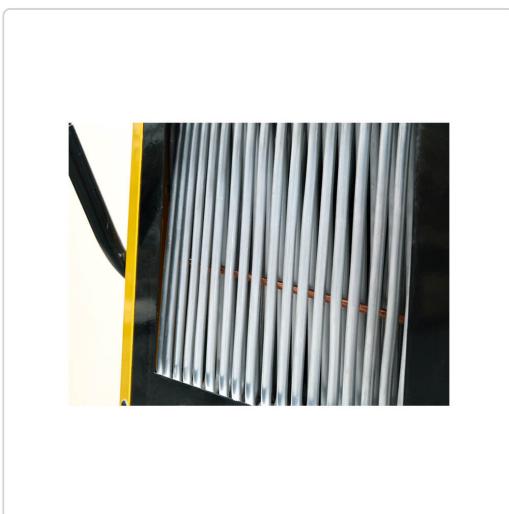

Wide spaces between evaporator tubes prevent clogging

Key features

- ✓ Long-lasting steel casing
- ✓ High efficiency
- ✓ Hour counter
- ✓ Large water tank with automatic shut-off when full
- ✓ Possibility to connect a hose to remove condensed water
- ✓ Tank full indicator
- ✓ Air filter
- ✓ Automatic fast defrosting by hot gases

- Restarts automatically after a power failure
- Large wheels and handle
- Built-in hygrometer

Product specifications

| Specifications | Units | DH 44 |
|--------------------------------|-------------------|-----------------|
| Capacity (30°C/80% RH) | l/24h | 41 |
| Capacity (20°C/60% RH) | l/24h | 17 |
| For rooms of approx. | m ³ | 615 |
| For restoration after flooding | m ³ | 246 |
| Air flow | m ³ /h | 480 |
| Operating temperature range | °C | 1-32 |
| Operating humidity range | % | 30-98 |
| Refrigerant | | R1234YF |
| Power consumption | W | 610 |
| Power supply | V/Hz | 220-240/1ph/50 |
| Sound level | dB(A) | 53 |
| Compressor | | Rotary |
| Tank capacity | l | 12 |
| Product size (l x w x h) | mm | 600 x 580 x 850 |
| Box size (l x w x h) | mm | 590 x 580 x 830 |
| Net/gross weight | kg | 43/47 |
| Pallet | pcs | 4 |
| Dual voltage | | Available |

