

FB20 fixing band is for all general light strapping needs. Perfect for DIY, industrial and agricultural applications. Comes in convenient 10 metre rolls. FB20 comes supplied in a rugged plastic dispenser, making it much easier to transport and work with.

Features


Material

- Galvanized steel S250GD + Z275 according to BS EN 10346.

Applications

Features

- Supplied on a 10 metre roll.
- Suitable for internal applications only
- Strap is punched with two different sized round holes and 1 square hole, to enable a variety of different fixings to be used
 - Nails
 - Screws
 - Coach Screws



Technical Data


Product Dimensions



References	Dimensions			Holes [mm]			Strap Minimum Section [mm ²]	Pkg.	Weight [kg]
	A	B	t	Size (Round)	Size (Round)	Size (Square)			
FB20	20	10 m	0.9	Ø4	Ø7	7x7	10.8	10	1.2

* Not covered by CE certification

Characteristic Capacities

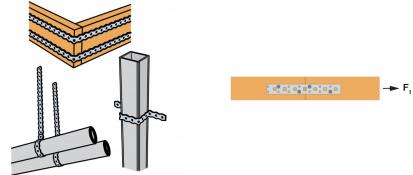

References	Strap Characteristic Tensile Capacity [kN]	
	R _{1,k}	
FB20	3	

Note:

- The capacity of the connection is the lower of the straps declared characteristic tensile capacity or the fixing capacity.
- The quantity, type and size of fixings along with its spacings, edge distances and fixing substrates should be considered when determining the capacity of the connection.

Installation

Fixings

- Nails
- Screws
- Coach Screws

Winchester Road Cardinal Point Tamworth Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

FB20
Fixing Band

Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®

2025-05-23

www.strongtie.co.uk



SIMPSON
Strong-Tie®